



PFB STAGE PLOT & INPUT LIST

MONITOR MIX & SPLIT SNAKE INPUT LIST (16 CHANNELS)

CHANNEL INPUT LIST

1	Kick	Internal Mic – XLR jack on lower left side of bass drum. Sennheiser e602-II Shure Beta52
2	Snare	
3	Hi-Hat	
4	Tom 1	
5	Floor Tom	
6	Bass Guitar	John
7	Guitar 1 – Stage Right	Mike
8	Guitar 2 – Stage Left	Pino
9	Vox 1 – Stage Right	Mike: Sennheiser e835 <i>Boom needed</i>
10	Vox 2 – Center	Pino: Heil PR 37 Has Mic Stand
11	Vox 3 – Stage Left	John: Shure SM58 <i>Boom needed</i>
12	Vox 4 – Drums	Glenn: Shure Beta56A Has Boom
13	Spare	
14	Spare	
15	Spare	
16	Talkback	

BAND MEMBERS

Pino	Lead Vocals & Acoustic Guitar 2
Mike	Lead Guitar 1 & Backing Vocals
John	Bass & Backing Vocals
Glenn	Drums & Backing Vocals


NOTES

- 110/120V AC outlets as noted on the stage plot.
- All band members provide their own personal microphones.
- Boom stands are required for Vox Mic 1 and Vox Mic 3.
- Three monitor mixes are needed for Mike, Pino, and John.
- Drummer uses a personal X32 IEM system; can also control his monitor mix via the FOH console app when available.



MANAGEMENT@
PINOFARINABAND.COM
PINOFARINABAND.COM

STAGE PLOT

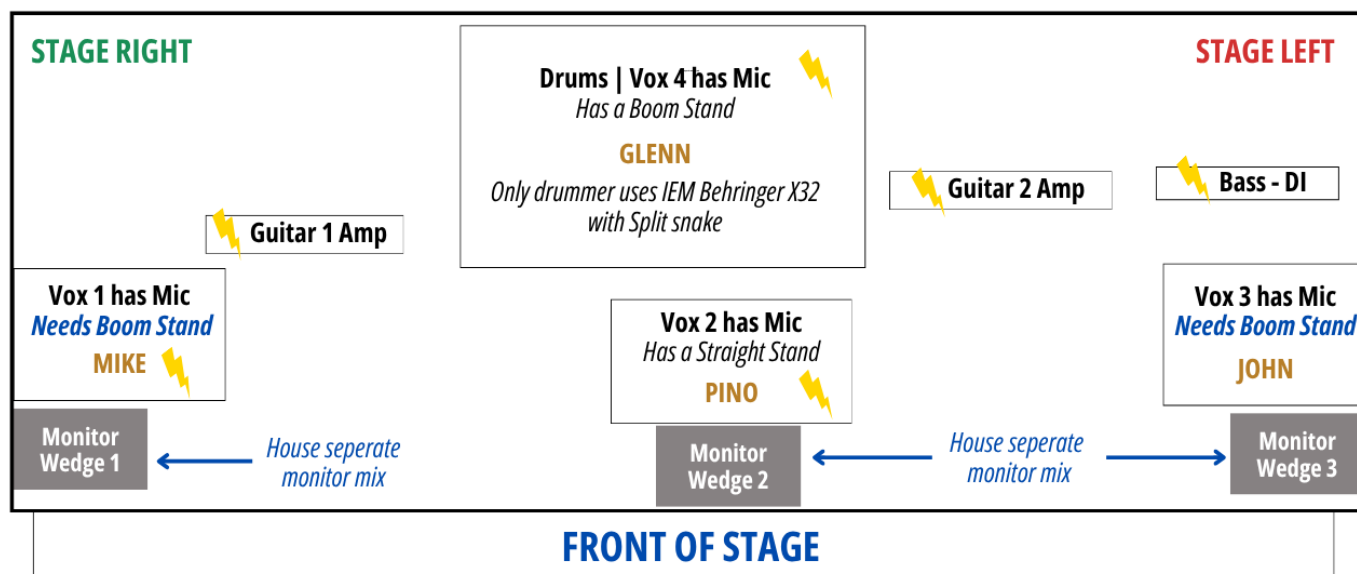

Updated August 7, 2026